

Product Brochure For C060

## 5MT Live Centre

Taiwanese Precision Quality  
2000rpm, 1065kg Load Capacity



**On Sale**

	<b>Ex GST</b>	<b>Inc GST</b>
	<del>\$440.00</del>	<del>\$506.00</del>
	<b>\$350.43</b>	<b>\$403.00</b>

ORDER CODE:	C060
Taper (MT):	5MT
Point Type:	Standard
Maximum Speed (rpm):	2000
Maximum Load Capacity (kg):	1065
Angle ? (deg):	60
A (mm):	54
B (mm):	72
C:	136
D:	65
D1:	52
d:	~
E (mm):	~
F (mm):	~
G (mm):	~
L (mm):	262
Nett Weight (kg):	3.7




### Description

Toolmaster live centre's are fitted with needle, thrust and ball bearings suitable for medium to high speed lathes with heavy loads. The shaft is made from alloy steel heat treated to HRC 60° providing high rigidity and high durability.


### Features

- Maximum speed 2000rpm @ 400kg
- Maximum load 1065kg @ 70rpm
- Hardened to HRC 60°
- Made from alloy steel
- Assembled with thrust, needle & ball bearings

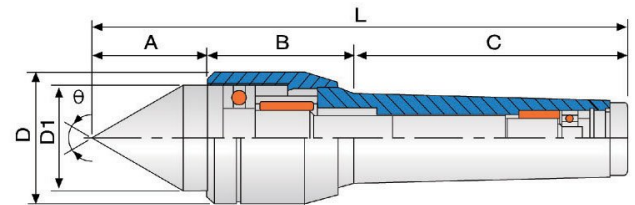

Product Brochure For C060

**Specific Features**

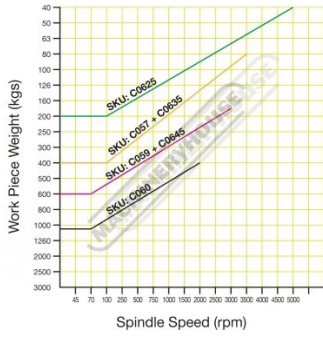

Work Piece Load Graph



Side View



Rear View



Wooden Case