

## Product Brochure For C143

### Chain Block - HS-S 1T3M


1 Tonne x 3 Metre



**On Sale**

Ex GST	Inc GST
<b>\$160.00</b>	<b>\$184.00</b>
<b>\$117.39</b>	<b>\$135.00</b>

ORDER CODE:	C143
MODEL:	HS-S 1T3M
Lift Capacity (kg / Tonne):	1000 / 1
Lift Height (Metre):	3
Weight (kg):	12.5

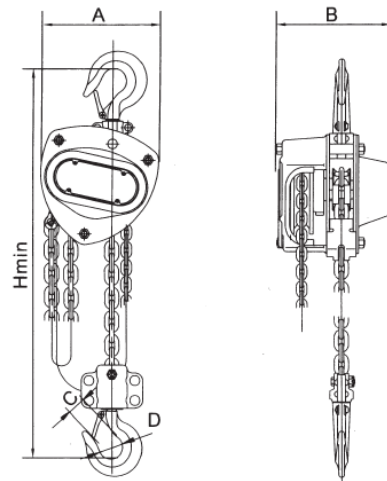

### Description

Our 1-tonne, 3-metre Manual Chain Block is designed for reliable lifting performance across workshops, warehouses, construction sites, and maintenance environments. Built with a focus on durability and user confidence, it delivers smooth, controlled lifting operations while maintaining consistent load stability.

This unit is engineered to handle demanding day-to-day tasks, offering dependable operation whether used for equipment positioning, load handling, or general lifting requirements. Its compact design makes it easy to set up, transport, and operate in a wide range of applications, ensuring versatility without compromising on strength.

Developed for professionals who need a trustworthy lifting solution, this chain block reflects a balance of robust construction and practical usability, making it a staple tool for safe and efficient lifting.

### Features

- Heavy-duty steel cast body with an impact-resistant gear case and reinforced side covers
- Precision-engineered bottom hooks featuring ball bearings and secure safety latches
- Fitted with stainless steel HAFCO ID plates and rivets to prevent sparking in sensitive environments
- Each HAFCO Chain Block carries an individual serial number linked directly to its test certificate
- Features
- Suitable for use in underground mining and heavy-duty applications with no aluminum components
- Fully Enclosed Gear and Brake System – Provides maximum protection from dust, debris, and weather, ensuring long service life.
- Small Headroom Design – Optimised for lifting in confined spaces and low-clearance environments
- Precise Chain Guide System – Patented design for smooth,

MODEL	HCB1T3M	HCB1T6M	HCB2T3M
Capacity (kg)	1000	1000	2000
Standards Lift (m)	3	6	3
No. of Load Chain Falls	1	1	1
Load Chain Dia. (mm)	6*18	6*18	8*24
Effort required to lift Max. Load (N)	280	280	360
Dimensions (mm)	A (mm)	127	167
	B (mm)	103	133
	C (mm)	32	36
	D (mm)	42.5	46.5
	Hmin (mm)	310	380
Nett Weight (kg)	7.3	10.66	14.9

## Product Brochure For C143

- reliable chain movement and reduced risk of jamming.
- Fitted with Grade 80 calibrated lifting chain
- QR Code scan for quick manual specifications
- Rated working load capacity: 1T with 3M chain drop
- Complies to AS 1418.2

### Specific Features



Side View



Top Hook



Lifting Hook

### Recommended Accessories

H300  
Round Sling

H316  
Flat Sling

H305  
Round Sling

H318  
Flat Sling



Product Brochure For C143

H308  
Round Sling



H307  
Round Sling



H320  
Flat Sling



C146  
Girder Clamp



C147  
Girder Trolley



C148  
Girder Trolley



C188  
Mobile Girder Rail Gantry



K088  
Mobile Girder Rail Gantry Package Deal



K090  
Mobile Girder Rail Gantry Package Deal



C191  
Digital Crane Scale



H350  
11mm 1.5T Grade S - Lifting Bow Shackle

