

Product Brochure For D720C

## 200mm Easson Digital Readout Scale

GS30 Compact Scale  
5µm Resolution



**On Sale**

<b>Ex GST</b>	<b>Inc GST</b>
<b>\$244.00</b>	<b>\$280.60</b>
<b>\$194.78</b>	<b>\$224.00</b>

ORDER CODE:	D720C
MODEL:	~
Type:	GS30 Compact Scale
Travel - Maximum (mm):	200
Overall Length (L) (mm):	344
Scale Resolution (µm):	5
Grating Pitch:	~
Accuracy (µm):	±6
Output Signal:	~
Connector:	~
Cable Length (Metre):	3
Working Temperature (°C):	~
Sealing Protection Class:	~
Maximum Speed (M/min):	~
Reference Point:	~
Width x Height (W x H) (mm):	20 x 28.5
Backing Support Plate (Yes / No):	Yes




### Description

Easson GS series Glass Grating Linear Transducer: EASSON - Always committed to Quality, Technology & Innovation

### Features

- **SINGLE SEAL DESIGNED SCALES:**
- The plastic seals of the transducer use an innovative material to offer superior oil resistance, high elastic recovery properties and durability, carefully designed lip geometry offer low slide resistance.
- **100% LASER CALIBRATION:**
- All glass grating transducers are individually inspected and calibrated by our in-house laser calibrator to ensure accuracy complies 100% with the specifications.
- **ADVANCED OPTICAL MEASURING SYSTEM:**
- The slide carrier of the GS series scales, use a five bearing design for optical grating linear transducer which has been proven as the most reliable system design in today's market.
- The glass grating slide-ways are lapped, and JIS standard P5 grade bearings are used to achieve smooth and accurate movement and long working life.
- **D.I.Y. INSTALLATION:**
- An easy-to-follow D.I.Y. Installation Manual is supplied with each system, complete with illustrations and mounting brackets.

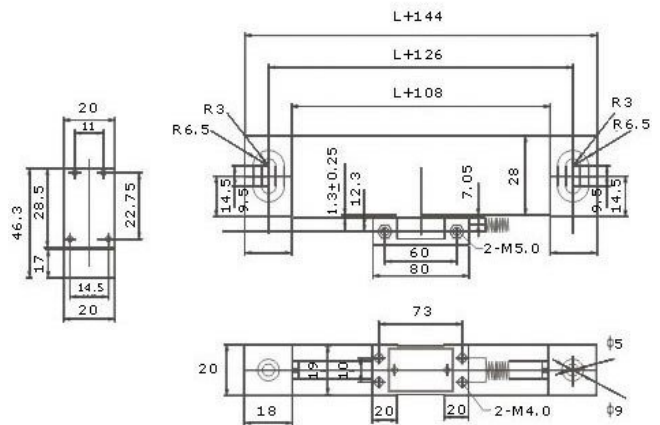

GS30 from 50mm to 500mm

Product Brochure For D720C

MODEL		VS 10	
<b>Measuring Standard</b>	Glass scale - Grating		
<b>Optical Detecting System</b>	Transmissive Infrared		
<b>Slide Carrier System</b>	Vertical five bearing supporting system	45° support	
<b>Resolution</b>	5µm		
<b>Measurement Travel (100-1200mm)</b>	Every 50mm per length specification		
<b>Measurement Travel (1300-3000mm)</b>	-		Every length
<b>Accuracy (100-450mm)</b> <b>Accuracy (500-1000mm)</b> <b>Accuracy (1050-1250mm)</b> <b>Accuracy (1300-3000mm)</b>	±3 - ±5µm ±10µm ±10µm -		
<b>Repeatability</b>	2µm		
<b>Hysteresis</b>	3µm		
<b>Protection</b>	DIN		
<b>Power Supply</b>	DC		
<b>Output Signals</b>			

## Product Brochure For D720C

### Specific Features



DSub9 Male Plug

**Dsub 9**  
9 pin male connector plug

Pin	TL	422A	Signal	Cable	Signal	Color
1	—	A	Yellow			
2	0V	Orange	0V	White		
3	—	B	Red			
4	Gnd	Ground	Gnd	Ground		
5	—	R	Black			
6	A	Yellow	A	Green		
7	5V	Red	5V	Brown		
8	B	Green	B	Blue		
9	R	Brown	R	Gray		

Dsub9 Wiring Diagram



**DIY INSTALLATION**  
An easy-to-follow DIY Installation Manual is supplied with each system, complete with illustrations and mounting brackets.

DIY Installation

### Recommended Accessories

D709

Easson Scales - Extension Cable



D710

Easson Scales - Extension Cable



D772

Digital Readout Scale Mounting Bracket Kit



D711

Adaptor Cable



D712

Adaptor Cable

