

Product Brochure For D737

# 1200mm Easson Digital Readout Scales

VS10 Standard Scale  
5µm Resolution

**On Sale**

<b>Ex GST</b>	<b>Inc GST</b>
<b>\$488.00</b>	<b>\$561.20</b>
<b>\$390.43</b>	<b>\$449.00</b>



ORDER CODE:	D737
MODEL:	~
Type:	VS10 Standard Scale
Travel - Maximum (mm):	1200
Overall Length (L) (mm):	1346
Scale Resolution (µm):	5
Grating Pitch:	~
Accuracy (µm):	±10
Output Signal:	~
Connector:	~
Cable Length (Metre):	5
Working Temperature (°C):	~
Sealing Protection Class:	~
Maximum Speed (M/min):	~
Reference Point:	~
Width x Height (W x H) (mm):	27.5 x 33.5
Backing Support Plate (Yes / No):	No




## Description

Easson VS series Glass Grating Linear Transducer: EASSON - Always committed to Quality, Technology & Innovation

## Features

- **DOUBLE SEAL DESIGNED SCALES:**
- The plastic seals of the transducer use an innovative material to offer superior oil resistance, high elastic recovery properties and durability, carefully designed lip geometry offer low slide resistance.
- **100% LASER CALIBRATION:**
- All glass grating transducers are individually inspected and calibrated by our in-house laser calibrator to ensure accuracy complies 100% with the specifications.
- **ADVANCED OPTICAL MEASURING SYSTEM:**
- The slide carrier of the VS series scales, use a five bearing design for optical grating linear transducer which has been proven as the most reliable system design in today's market.
- The glass grating slide-ways are lapped, and JIS standard P5 grade bearings are used to achieve smooth and accurate movement and long working life.
- **D.I.Y. INSTALLATION:**
- An easy-to-follow D.I.Y. Installation Manual is supplied with each system, complete with illustrations and mounting brackets.

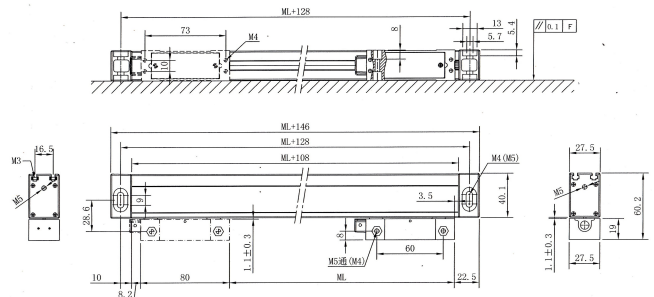


Product Brochure For D737

MODEL		VS 10	
<b>Measuring Standard</b>	Glass scale - Grating		
<b>Optical Detecting System</b>	Transmissive Infrared		
<b>Slide Carrier System</b>	Vertical five bearing supporting system	45° support	
<b>Resolution</b>	5µm		
<b>Measurement Travel (100-1200mm)</b>	Every 50mm per length specification		
<b>Measurement Travel (1300-3000mm)</b>	-	Every length	
<b>Accuracy (100-450mm)</b> <b>Accuracy (500-1000mm)</b> <b>Accuracy (1050-1250mm)</b> <b>Accuracy (1300-3000mm)</b>	±3 - ±5µm ±10µm ±10µm -		
<b>Repeatability</b>	2µm		
<b>Hysteresis</b>	3µm		
<b>Protection</b>	DIN		
<b>Power Supply</b>	DC		
<b>Output Signals</b>			

Product Brochure For D737

**Specific Features**



DSub9 Male Plug

**Dsub 9**  
9 pin male connector plug

Pin	TL	422A	Signal	Cable	Signal	Color
1	—	—	A	Yellow		
2	0V	Orange	0V	White		
3	—	—	B	Red		
4	Gnd	Ground	Gnd	Ground		
5	—	—	R	Black		
6	A	Yellow	A	Green		
7	5V	Red	5V	Brown		
8	B	Green	B	Blue		
9	R	Brown	R	Gray		

Dsub9 Wiring Diagram



DIY Installation



Parts



Close Up

**Recommended Accessories**


**D709**  
Easson Scales - Extension Cable



**D710**  
Easson Scales - Extension Cable



**D772**  
Digital Readout Scale Mounting Bracket Kit



**D711**  
Adaptor Cable



## Product Brochure For D737

---

D712  
Adaptor Cable

